


Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m3
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 60 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
 - Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

| Type Tipo | N. Stages N. Etage N. Etapas | Motor/ Moteur | | | Pump/ Pompes/ Bombas | | | | Q m3/h l/min | Delivery/ Debit/ Caudal | | | | | | | |
|--------------|------------------------------------|---------------|-------|-------|----------------------|--------------------|--------|------|------------------------------|-------------------------|-------|-------|-------|-------|-------|-------|------|
| | | Type Tipo | KW | HP | A (mm) | DN (RPT or NPT) | B (mm) | Kg | | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 |
| WSP6 60-3 | 3 | 4"/ 6" | 5.50 | 7.50 | 558 | 3" | 144 | 16.0 | H m Hauteurman/ Alturaman | 44.9 | 44.1 | 41.8 | 38.1 | 33.0 | 26.3 | 18.2 | 8.5 |
| WSP6 60-4 | 4 | 6" | 7.50 | 10.00 | 652 | 3" | 144 | 19.5 | | 58.2 | 56.9 | 54.0 | 49.6 | 43.5 | 35.9 | 26.6 | 15.5 |
| WSP6 60-5 | 5 | 6" | 9.30 | 12.50 | 746 | 3" | 144 | 23.0 | | 72.6 | 69.3 | 65.4 | 60.6 | 54.9 | 46.9 | 34.6 | 17.4 |
| WSP6 60-6 | 6 | 6" | 11.00 | 15.00 | 840 | 3" | 144 | 26.0 | | 87.0 | 82.4 | 77.3 | 71.7 | 65.5 | 56.5 | 42.1 | 21.2 |
| WSP6 60-7 | 7 | 6" | 13.00 | 17.50 | 934 | 3" | 144 | 29.5 | | 102.6 | 97.4 | 91.5 | 84.7 | 77.1 | 66.0 | 48.7 | 23.5 |
| WSP6 60-8 | 8 | 6" | 15.00 | 20.00 | 1028 | 3" | 144 | 33.0 | | 117.3 | 111.3 | 104.5 | 96.8 | 88.2 | 75.4 | 55.7 | 26.9 |
| WSP6 60-9 | 9 | 6" | 18.50 | 25.00 | 1122 | 3" | 144 | 36.0 | | 132.0 | 124.2 | 116.4 | 108.6 | 99.7 | 84.8 | 62.6 | 30.2 |
| WSP6 60-10 | 10 | 6" | 18.50 | 25.00 | 1216 | 3" | 144 | 39.5 | | 146.6 | 138.7 | 130.0 | 120.5 | 110.2 | 94.2 | 70.0 | 33.6 |
| WSP6 60-11 | 11 | 6" | 22.00 | 30.00 | 1310 | 3" | 144 | 43.0 | | 160.9 | 152.7 | 143.4 | 132.8 | 120.9 | 103.5 | 77.2 | 36.6 |
| WSP6 60-12 | 12 | 6" | 22.00 | 30.00 | 1404 | 3" | 144 | 46.0 | | 175.4 | 165.8 | 155.3 | 143.9 | 131.7 | 112.5 | 83.9 | 39.8 |
| WSP6 60-14 | 14 | 6" | 26.00 | 35.00 | 1592 | 3" | 144 | 53.0 | | 195.0 | 187.3 | 176.8 | 163.1 | 146.0 | 124.5 | 93.7 | 47.5 |
| WSP6 60-15 | 15 | 6" | 30.00 | 40.00 | 1686 | 3" | 144 | 56.0 | | 210.7 | 204.0 | 194.5 | 182.0 | 164.4 | 139.8 | 105.2 | 53.3 |
| WSP6 60-16 | 16 | 6" | 30.00 | 40.00 | 1780 | 3" | 144 | 59.5 | | 226.7 | 222.4 | 213.8 | 200.8 | 182.7 | 155.1 | 116.8 | 59.1 |
| WSP6 60-18 | 18 | 6" | 37.00 | 50.00 | 1968 | 3" | 144 | 66.5 | | 249.9 | 244.0 | 234.2 | 219.9 | 200.5 | 170.9 | 129.7 | 65.2 |
| WSP6 60-19 | 19 | 6" | 37.00 | 50.00 | 2062 | 3" | 144 | 69.5 | | 265.7 | 259.1 | 248.5 | 233.5 | 213.5 | 181.3 | 137.1 | 70.4 |
| WSP6 60-20 | 20 | 6" | 37.00 | 50.00 | 2156 | 3" | 144 | 73.0 | | 280.0 | 272.7 | 261.5 | 247.0 | 225.3 | 193.9 | 144.6 | 75.6 |

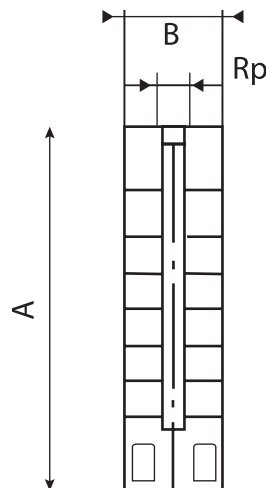

WATEX WSP 6" - 60

BOMBAS SUMERGIDAS 6"
6" SUBMERSIBLE PUMPS
POMPES IMMERGEES 6"

50 Hz - 2 polos - 2900 rpm

* WATEX se reserva el derecho de realizar modificaciones en sus especificaciones de producto sin previa notificación.
* WATEX reserve the right to amend specifications or data without prior notice.

