


Performance/ Performances/ Prestaciones

- Maximum sand quantity in the water/ Max quantite de sable dans l'eau/
Maxima cantidad de arena en el agua - 200 g/m3
- Water temperature up to/ Temperature de l'eau jusqu' a/ Temperature del agua hasta - 60 degree Celcius
 - Connection/ Connexion/ Acoplamiento - NEMA Standards
 - Impeller/ Roues/ Rodete - mixed flow/ helicocentrifuges/ semi axiales
- Installation/ Instalacion - horizontal and vertical/ horizontale and verticale

Type Tipo	N.Stages/ N. Etage/ N. Etapas	Motor/ Moteur			Pump/ Pompes/ Bombas				Q m3/h l/min	Delivery/ Debit/ Caudal				
		Type Tipo	KW	HP	A (mm)	DN (RPT or NPT)	B (mm)	Kg		0 0	5 83.3	10 166.6	15 250	20 333
WSP6 14-6	6	4"	4.00	5.50	606	2.5"	136	16.0	Head/ Hauteurman/ Alturaman H m	52.0	50.4	47.4	42.7	32.8
WSP6 14-9	9	4"	5.50	7.50	786	2.5"	136	22.0		80.0	76.0	69.9	62.3	47.7
WSP6 14-12	12	4"/ 6"	7.50	10.00	972	2.5"	136	29.0		104.0	98.5	92.3	83.0	65.0
WSP6 14-17	17	6"	9.30	12.50	1272	2.5"	136	38.5		136.0	133.1	127.0	112.1	84.9
WSP6 14-21	21	6"	11.00	15.00	1512	2.5"	136	46.5		168.0	164.5	157.2	138.0	105.0
WSP6 14-25	25	6"	13.00	17.50	1752	2.5"	136	54.0		204.0	198.5	186.3	166.0	127.0
WSP6 14-29	29	6"	15.00	20.00	1992	2.5"	136	62.0		240.0	234.7	222.8	198.9	152.7
WSP6 14-34	34	6"	18.50	25.00	2292	2.5"	136	71.5		279.4	274.1	259.7	232.9	178.0
WSP6 14-42	42	6"	22.00	30.00	2772	2.5"	136	87.0		344.0	335.8	318.3	280.3	214.8
WSP6 14-50	50	6"	26.00	35.00	3252	2.5"	136	103.0		408.9	399.3	377.8	333.5	254.8

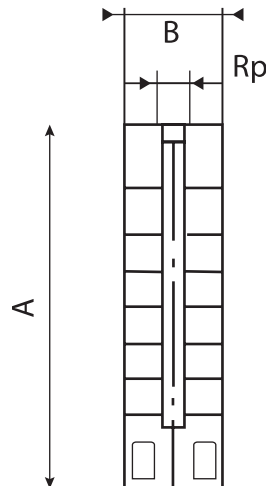

WATEX WSP 6" - 14

BOMBAS SUMERGIDAS 6"
6" SUBMERSIBLE PUMPS
POMPES IMMERGEES 6"

50 Hz - 2 poles - 2900 rpm

* WATEX se reserva el derecho de realizar modificaciones en sus especificaciones de producto sin previa notificación.
* WATEX reserve the right to amend specifications or data without prior notice.

